



## BC51 – Alarm Console

Easily arm/disarm sites, review events, initiate panic alarms, and talk down to intruders.

### Overview

#### Site Management and Visibility


- Arm and disarm your site with integrated digital keypad.
- See a feed of recent alarms and key events that have occurred at your facility.
- Initiate panic alarm in an emergency.

#### Video Calls from Command

- Using the built-in camera, microphone, and speaker, instantly communicate with staff or talk down to intruders.
- Users can initiate a call to the Alarm Console from any device without plugins or additional software.

#### 10 Year Warranty

- Verkada's Alarm Console is covered by our 10-year warranty.

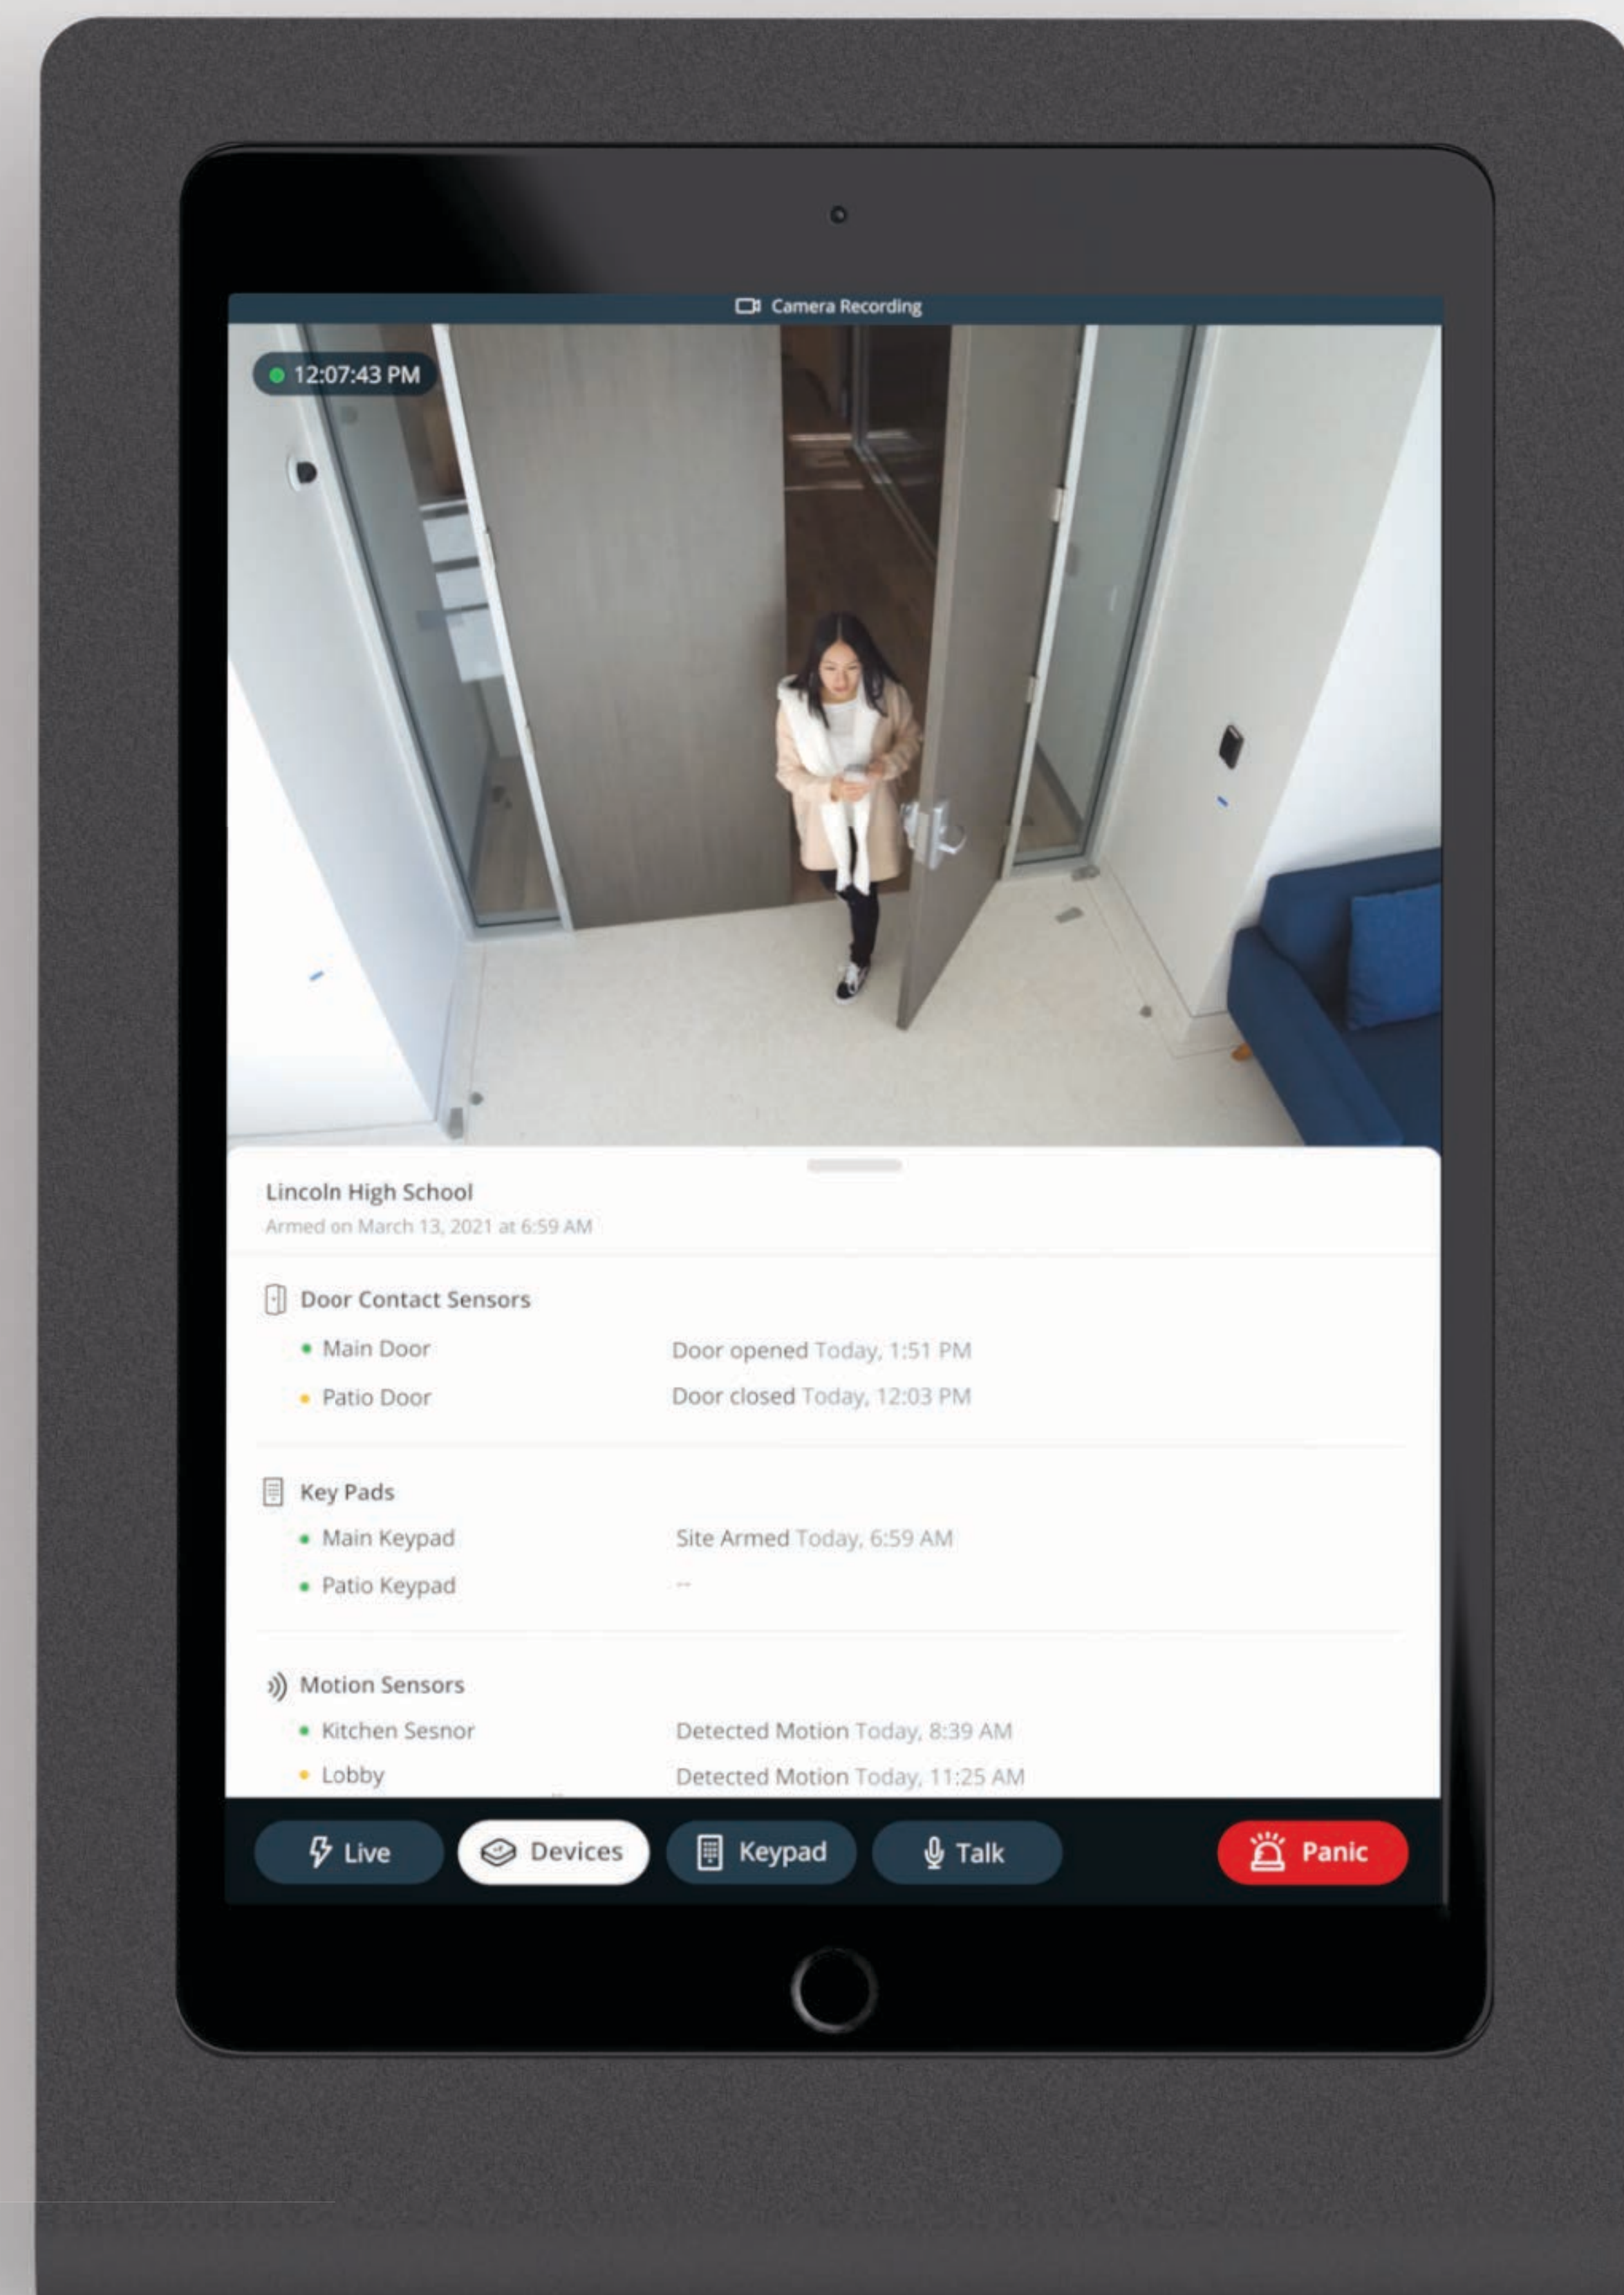

## Alarm Console Pricing

Product Name	Description	Cost (MSRP)
BC51-HW	Alarm Console	\$999
LIC-BC-1Y	1 Year Console License	\$249
LIC-BC-3Y	3 Year Console License	\$599
LIC-BC-5Y	5 Year Console License	\$999
LIC-BC-10Y	10 Year Console License	\$1,999

Alarm Console requires **Alarms License (LIC-BA)**

# BC51

## Tech Specs

---

<b>Power Consumption (at 10–14V)</b>	10W				
<b>Dimensions</b>	<table><thead><tr><th>Tablet</th><th>Mount</th></tr></thead><tbody><tr><td>250.6mm (L) x 174.1mm (W) x 7.5mm (H) 9.8in (L) x 6.8in (W) x .29in (H)</td><td>299.7mm (L) x 205.7mm (W) x 38.1mm (H) 11.8in (L) x 8.1in (W) x 1.5in (H)</td></tr></tbody></table>	Tablet	Mount	250.6mm (L) x 174.1mm (W) x 7.5mm (H) 9.8in (L) x 6.8in (W) x .29in (H)	299.7mm (L) x 205.7mm (W) x 38.1mm (H) 11.8in (L) x 8.1in (W) x 1.5in (H)
Tablet	Mount				
250.6mm (L) x 174.1mm (W) x 7.5mm (H) 9.8in (L) x 6.8in (W) x .29in (H)	299.7mm (L) x 205.7mm (W) x 38.1mm (H) 11.8in (L) x 8.1in (W) x 1.5in (H)				
<b>Display</b>	10.2-inch diagonal LED-backlit Multi-Touch 2160 x 1620 resolution 500 nits brightness				
<b>Camera</b>	720p HD video				
<b>Weight</b>	<table><thead><tr><th>Tablet</th><th>Mount</th></tr></thead><tbody><tr><td>490 grams / 1.09 lbs</td><td>1360 grams / 3 lbs</td></tr></tbody></table>	Tablet	Mount	490 grams / 1.09 lbs	1360 grams / 3 lbs
Tablet	Mount				
490 grams / 1.09 lbs	1360 grams / 3 lbs				
<b>Operating Temperature</b>	0°C – 35°C (32°F – 95°F)				
<b>Processor</b>	A12 Bionic chip with 64-bit architecture				
<b>Connectivity</b>	Ethernet: 10/100Mbps (through Lightning adapter)				
<b>Audio</b>	Stereo speakers, 3.5 mm jack for external speakers, Dual microphones				
<b>Battery</b>	32.4 watt-hour rechargeable lithium-polymer battery, Estimated 10 hours battery backup				
<b>Included Accessories</b>	Setup guide, gray steel mount with powdercoat finish, assembly tool, screw pack, PoE adapter				
<b>Mounting Options</b>	Dry wall anchors and screws, self-tapping screws for mullion installation				