

BP41 – Alarm Panel

Configure wired inputs and outputs for enhanced building security.

Overview

Complete Coverage


- 32 inputs for connecting wired sensors.
- 12V AUX for powered sensors.
- Two programmable 12V power outputs for sirens, strobes, and other alarm signaling devices.

Easy Install and Management

- Cloud-managed from Command for easy device configuration.
- Wire the Alarm Panel in minutes with ergonomic, easy to access 45° offset screw terminals.
- Supports nearly all N.O. / N.C. sensors and 12V output devices.
- Alarm Panels receive automatic software updates for the latest feature updates and security enhancements.

10 Year Warranty

- Verkada's Alarm Panel and sensors are covered by our 10-year warranty.

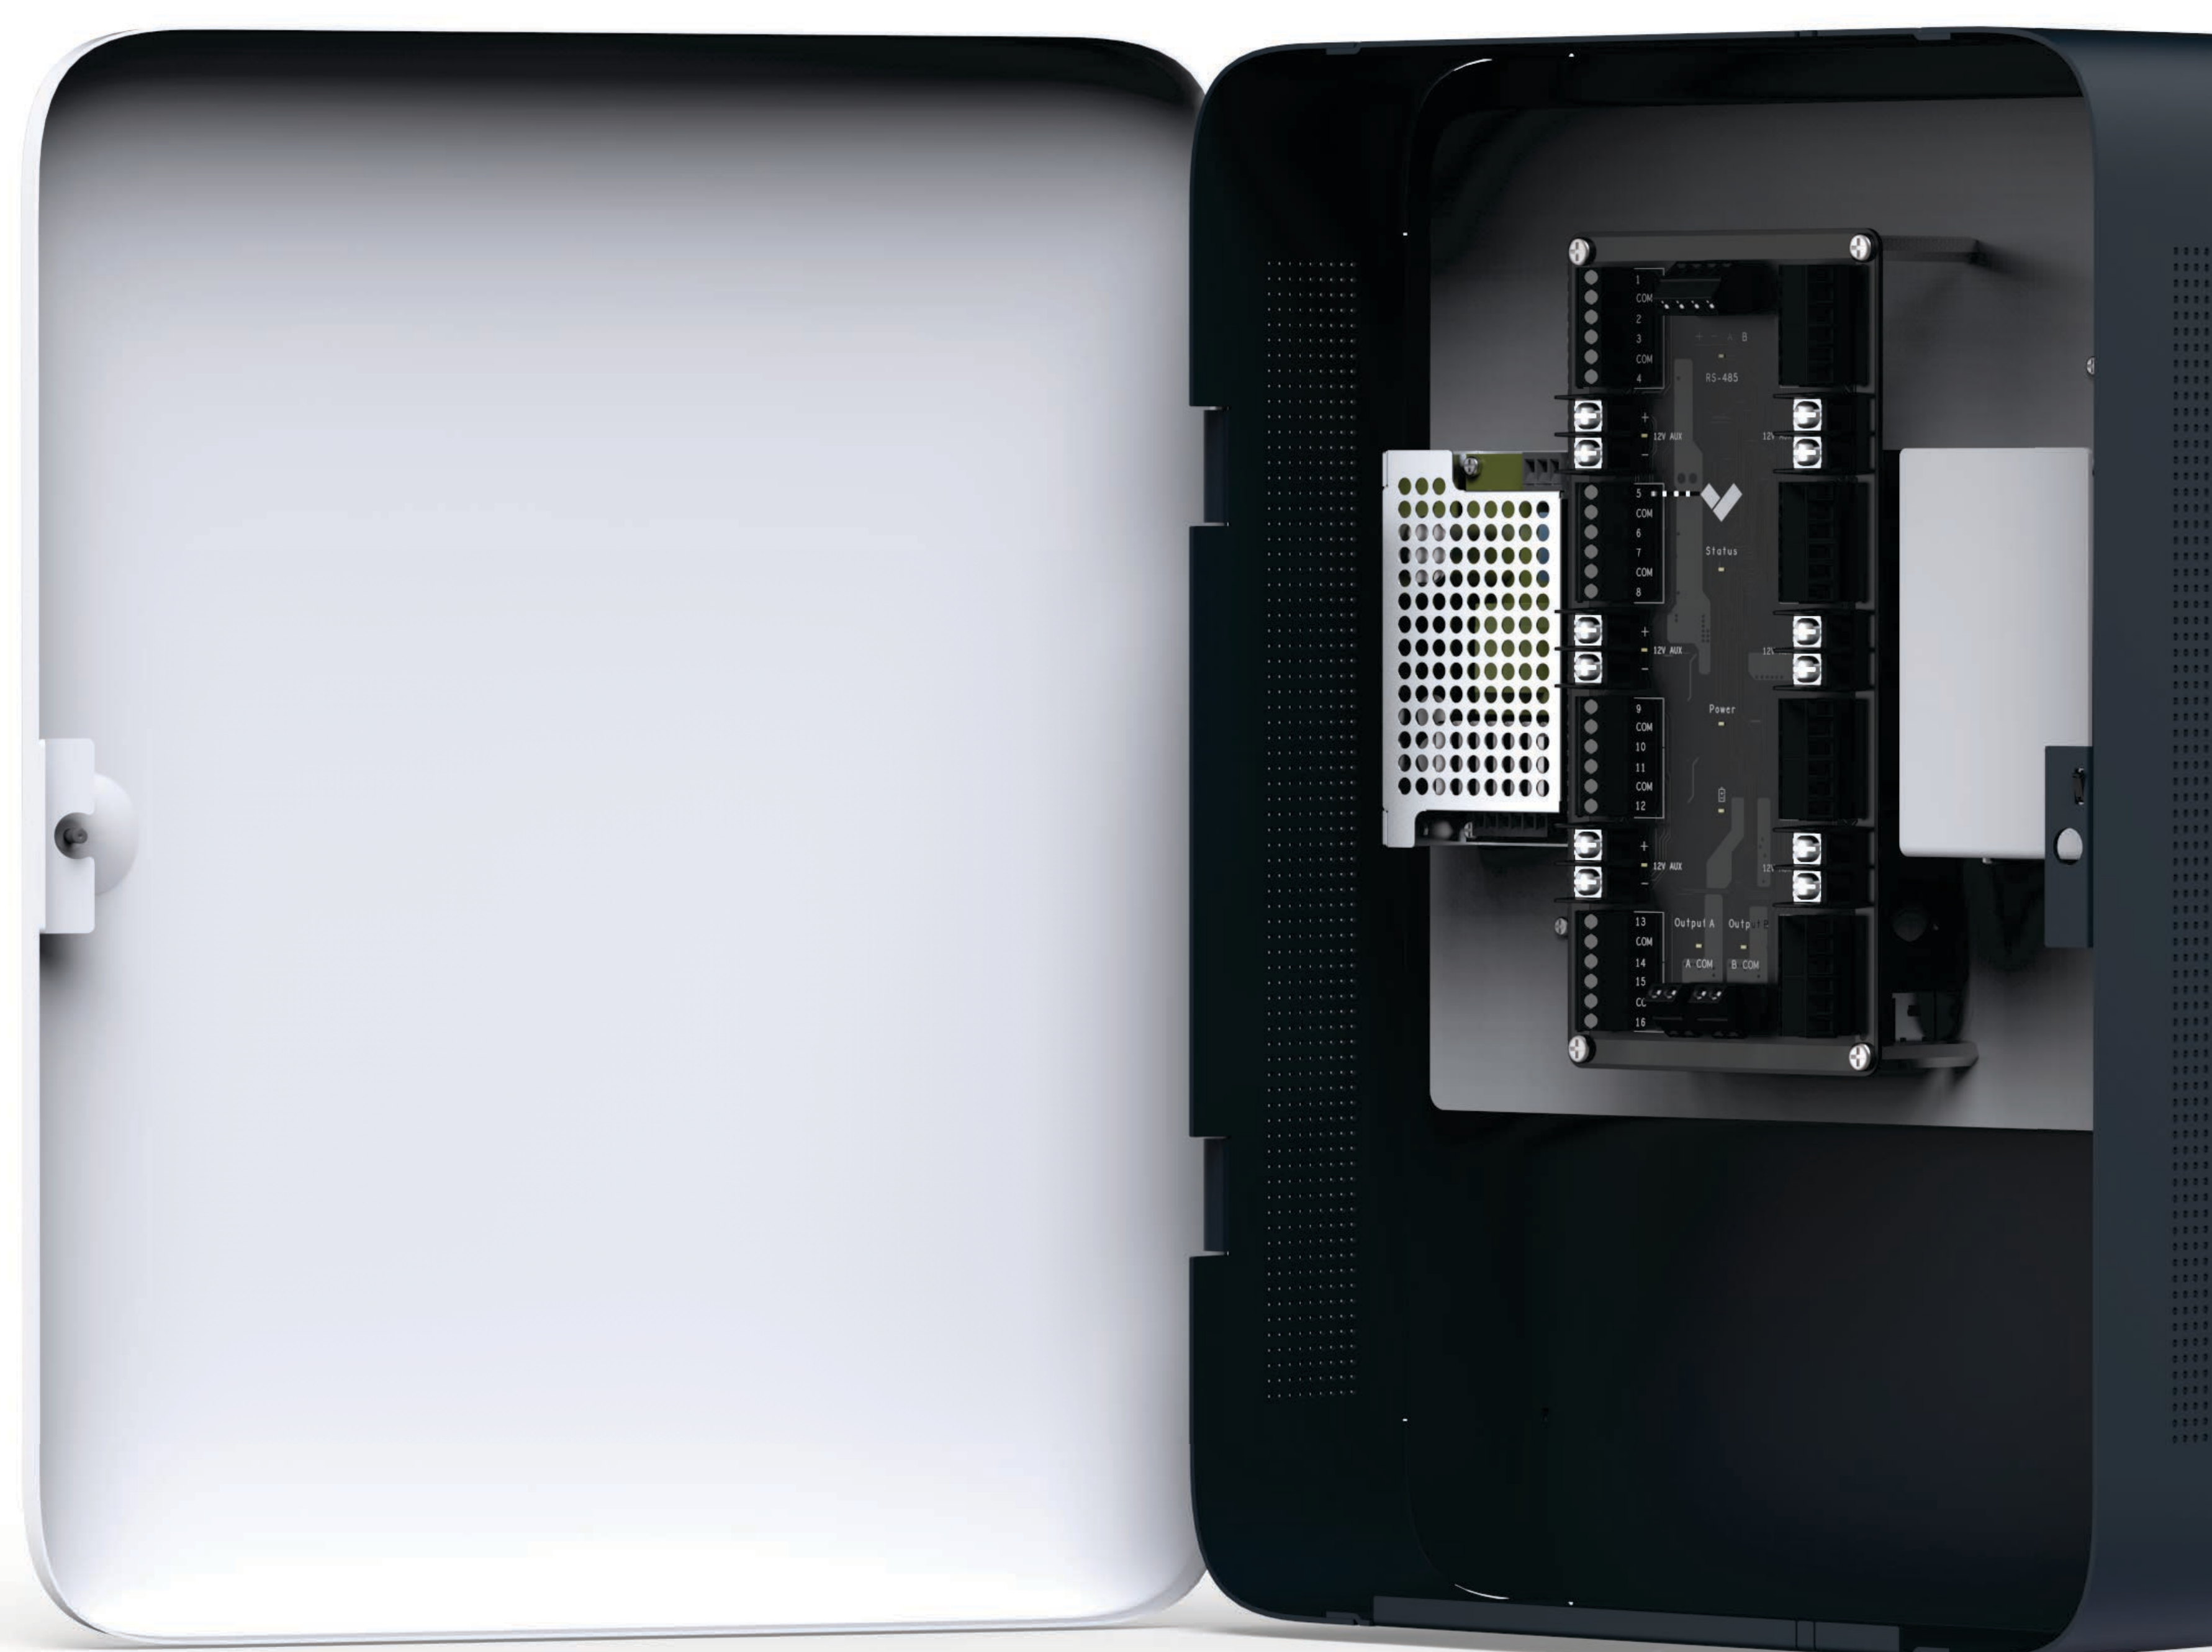

Alarm Panel Pricing

Product Name	Description	Cost (MSRP)
BP41-HW	32 Input Alarm Panel	\$999

Wired Motion Sensor Pricing

BR11-HW	Wired Motion Sensor	\$99
---------	---------------------	------

Wired Door Contact Pricing

BR12-HW	Wired Surface Mount Door Contacts - 5 Pack	\$99
BR13-HW	Wired Recess Mount Door Contacts - 5 Pack	\$99

Alarm Panel requires **Alarms License (LIC-BA)**

BP41

Tech Specs

Power Consumption (at 10-14V) 60W

Inputs 32 inputs for normally open or normally closed sensors
Optional 1 K Ω Single or Double EOLR Supervision

Outputs 2x 12V Programmable Outputs 1A each 12V AUX Power 2A total/combined

Dimensions 415.6 mm / 16.36 in (H) x 319.6 mm / 12.58 in (W) x 111.74 mm / 4.4 in" (D)

Weight 18.06 lbs / 8.19 kg

Operating Temperature 0°C - 50°C (32°F - 122°F)

Compliance FCC, CE

Connectivity Ethernet: 100/1000Mbps RJ-45 cable connector for network connection
USB 2.0

Included Accessories Setup guide, screw pack, torx screwdriver, AC cord, 32x 1k Ω end-of-line resistors

Mounting Options Dry wall anchors (M8) and screws (M5)
